

UpRight
XRT 27/33
27E/33E

SCISSOR lifts

electric & diesel rough terrain


- Working heights to 12.1m (39ft.)
- Driveable fully elevated with deck extended
- Standard 1m (39in.) roll-out deck extension
- Passes through standard double doorway
- One-hand proportional control
- High capacity steel platforms
- Sheet material loading system on platform
- Standard AC outlet at platform
- Easy access service modules
- On-board diagnostic system
- Five year structural warranty



specifications	XRT27/33	XRT27/33E
working height (A)	10.2m. (33ft.)* / 12.1m. (39ft.)*	10.2m. (33ft.)* / 12.1m. (39ft.)*
platform height (max.) (B)	8.2m (27ft.) / 10.1m (33ft.)	8.2m. (27ft.) / 10.1m. (33ft.)
drive height (max.)	8.2m. (27ft.) / 10.1m. (33ft.)	8.2m. (27ft.) / 10.1m. (33ft.)
platform capacity (max.)	567kg. (1,250lbs.) / 454kg. (1,000lbs.)	567kg. (1,250lbs.) / 454kg. (1,000lbs.)
platform size	1.5m. x 2.34m. (58ins. x 131ins.)	1.5m. x 2.34m. (58ins. x 131ins.)
width (C)	1.77m. (69.5ins.)	1.77m. (69.5ins.)
length (D)	2.69m (106ins.)	2.69m (106ins.)
overall height (E)	2.54m. (100ins.) / 2.69m. (106ins.)	2.54m. (100ins.) / 2.69m. (106ins.)
stowed height - rails folded (F)	1.83m. (71ins.) / 1.93m. (76ins.)	1.83m. (71ins.) / 1.95m. (77ins.)
weight	3,175kg. (7,000lbs.) / 3,706kg. (8,170lbs.)	3,300kg. (7,275lbs.) / 3,799kg. (8,375lbs.)
inside turning radius	1.72m. (68ins.)	2.28m. (90ins.)
control system	One-hand proportional control	One-hand proportional control
gradeability	22° (40%) / 19° (35%)	22° (40%) / 19° (35%)
lift speed raise/lower	34-34 secs. / 31-31 secs.	40-34 secs. / 39-31 secs.
drive axle	4 wheel hydraulic motors	dual 48V rear traction motors
energy source	Kubota D905E W/C diesel	8 x 6V 350Ah batteries
tyres	26 x 12 - 10 ply	26 x 12 - 10 ply
ground clearance	178mm. (7ins.)	178mm. (7ins.)
toeboards	152mm. (6ins.)	152mm. (6ins.)

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

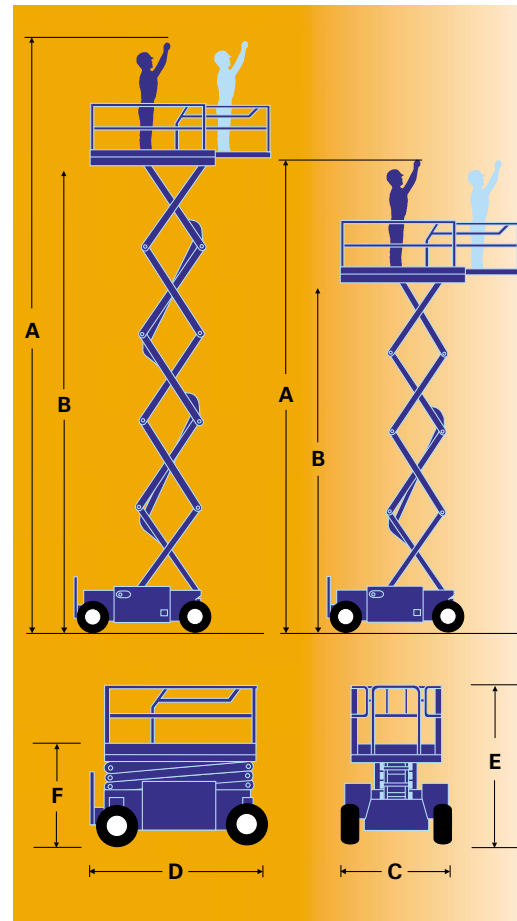

standard features


- 1m (39in.) roll-out deck extension
- Proportional controls
- 21 amp battery charger (Electric models only)
- Hour meter
- Battery charge indicator at platform (Electric models only)
- AC outlet on platform
- Descent alarm
- Tilt alarm
- Poly-filled tyres
- 1 year parts/service
- 5 year structural warranty

options

- Airline to platform
- Flashing amber beacon
- All motion alarm
- Removable controller
- Non-marking tyres (Electric models only)
- Horn, push button on controller
- Diesel exhaust scrubber (XRT 27/33 models only)
- Platform entry swing gate
- Special paint colours
- Environmental green oil



The XRT has good ground clearance, fast drive speed, and high grip lug tyres for excellent performance around the site.



manufactured by
UpRight

UpRight

www.upright.com
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 211 1674316
Fax + 49 211 1674317

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

