

OPTIMUM 1530E/1930E

The Haulotte® advantages

- Compact: stowed height for easy travel through standard doorways
- 6ft long and 2 ft 5 in wide allow operation in the most congested areas
- Outside turning radius 5 ft 6 in ensures excellent manoeuvrability
- 3 in ground clearance allows for both inside and outside use
- Pot Hole protection ensures maximum safety
- High battery capacity
- Robust, reliable and easy to maintain



STANDARD FEATURES

- Non marking tires
- 2 ft platform extension
alarm
- Drive speed
- 2 wheel drive and steer
- Free wheeling device
- 24 V - 4 x 6 V - 180 Ah batteries
- 30 Amp battery charger
- Battery charge indicator
- Hour meter
- Towing hooks / lifting eyes
- Emergency lowering system
- 110 V outlet
- Forklift pockets

OPTIONS & ACCESSORIES

- Travel alarm
- Flashing light
- Work light
- Overload device
- Inverter

Electric scissor lifts

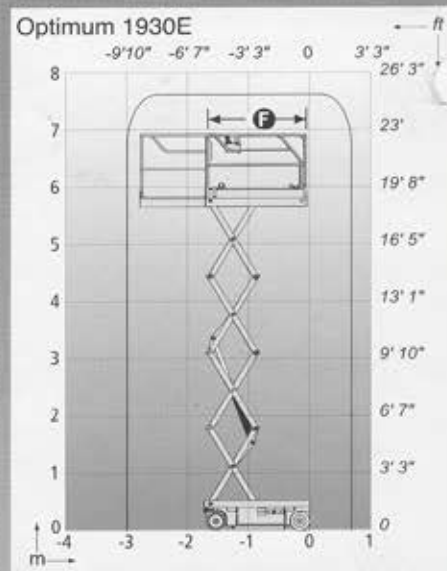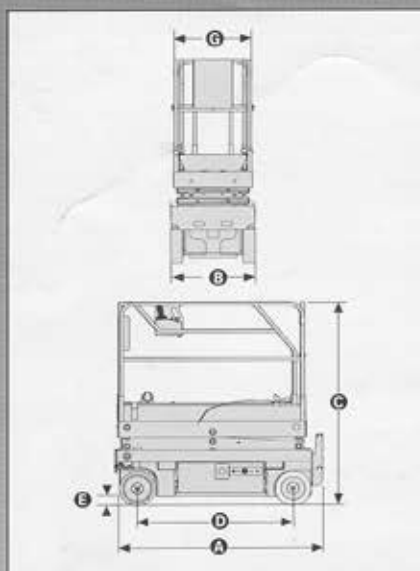

SPECIFICATIONS

	OPTIMUM 1530E	OPTIMUM 1930E
Working height	20 ft 7 in	24 ft 10 in
Platform height	14 ft 7 in	18 ft 10 in
Platform capacity	615 lb	500 lb
A Stowed length	5 ft 8 in	5 ft 8 in
with acces steps	6 ft	6 ft
B Width	2 ft 5 in	2 ft 5 in
C Stowed height (guardrails)	6 ft 3 in	6 ft 6 in
Stowed height (platform)	2 ft 7 in	2 ft 11 in
D Wheelbase	4 ft 6 in	4 ft 6 in
E Ground clearance	3 in	3 in
with deployed Pot Hole	0.9 in	0.9 in
F x G Platform size	65 in x 28 in	65 in x 28 in
Platform extension	3 ft	3 ft
Extension capacity	250 lb	250 lb
Drive speed	0.37 - 2.83 mph	0.37 - 2.83 mph
Outside turning radius	5 ft 6 in	5 ft 6 in
Lift / lower (sec.)	21 / 37	23 / 29
Gradeability	25°	25°
Controls	Proportional	Proportional
Batteries	180 Amp/h	180 Amp/h
Hydraulic tank	4,7 gal	4,7 gal
Weight	2,976 lb	3,197 lb

ANSI A92.6-1999 and CSA standard compliance

┌ DISTRIBUTED BY ┐



Haulotte®

HAULOTTE US INC • 7135 STANDARD DRIVE - HANOVER MD 21076 - USA

PHONE : +1 410 712 4403 • FAX : +1 410 712 4419 • MAIN TOLL FREE : +1 877-HAULOTTE • SERVICE TOLL FREE : +1 877-HAULOT-S • Web : <http://www.haulotte.com>

PINGUELY-HAULOTTE GROUP