



Paving Breakers



Features

- automatic valve
- drop forged alloy steel handle
- built-in automatic oiler
- rubber handle grips
- latch type retainer
- swivel hose connection
- noise dampening muffler available
- four-bolt backhead
- replaceable chuck bushing (except for model 140/140A)

Model 117 - 30 lb. class

Model 140 - 40 lb. class

Model 160 - 60 lb. class

Model 190 - 90 lb. class

Airgo-Line[®]

available in 40 lb., 60 lb., 90 lb. classes

- vibration dampening ergonomic handle designed to absorb the shock to the operator
- handle is interchangeable with APT standard model
- delivers same hitting power as the standard breaker with less fatigue to the operator
- replaceable vibration isolator

Model	Chuck Size	Bore	Stroke	B.P.M.	CFM @90PSI	Weight lbs.	Length in.	Air Inlet NPT
117	7/8x3-1/4 • 1x4-1/4	1-3/4	3-3/8	1850	34-48	33	21-3/4	3/8 male
140	1x4-1/4	1-7/8	4-1/4	1500	48	43	21-1/8	1/2 male
160	1-1/8x6 • 1-1/4x6	2-1/4	4-1/8	1680	60-65	68	25-3/4	1/2 male
190	1-1/8x6 • 1-1/4x6	2-5/8	6-1/8	1350	75-80	91	29	3/4 male
140A*	1x4-1/4	1-7/8	4-1/4	1500	48	46	24	1/2 male
160A*	1-1/8x6 • 1-1/4x6	2-1/4	4-1/8	1680	60-65	70	28-1/4	1/2 male
190A*	1-1/8x6 • 1-1/4x6	2-5/8	6-1/8	1350	75-80	90	31	3/4 male


* Airgo-Line

Airgo-Line[®] Backhead Assemble



Model	Assy. No.
140A	18034
160A	17684
190A	17720

Rock Drills

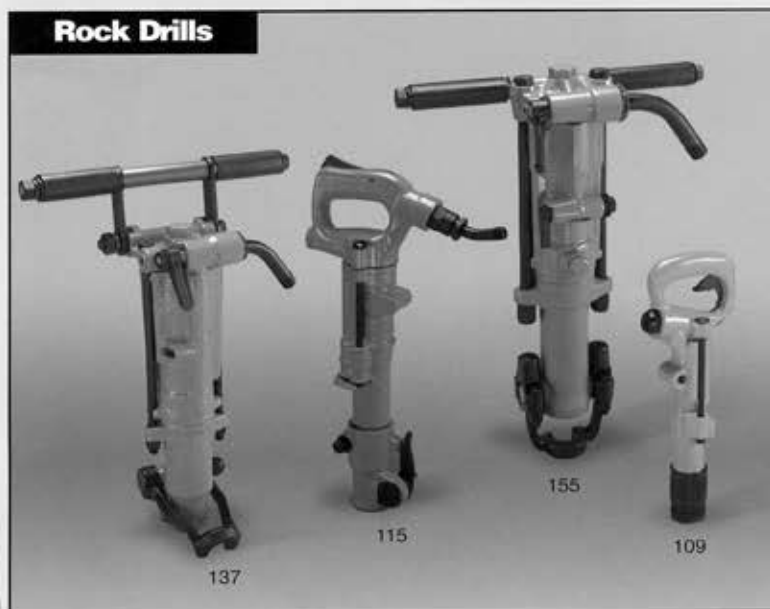

Model 109 - 9 lb. class

- available with spline chuck
- left-to-right hand rotation
- stop-rotation feature
- light-weight aluminum cast handle

Model 115 - 15 lb. class

- stop rotation feature
- built-in automatic oiler
- latch type retainer
- light-weight aluminum cast handle

Model 137 - 30 lb. class

- 4 drilling speeds
- replaceable piston stem bearing
- available wet or dry
- counter clockwise rotation
- rubber handle grips

Model 155 - 60 lb. class

- 3 drilling speeds
- replaceable piston stem bearing
- built-in automatic oiler
- available wet or dry
- counter clockwise rotation
- rubber handle grips

Model	Chuck Size	Bore	Stroke	B.P.M.	CFM @90PSI	Weight lbs.	Length in.	Air Inlet NPT
109	3/4x3-1/4 • Spline	1-1/4	1	3400	19-21	9	15	3/8 female
115	7/8x3-1/4	1-15/16	1-3/8	2900	32-36	19	18-3/8	3/8 male
137*	7/8x3-1/4 or 4-1/4•1x4-1/4	2-3/8	2-5/8	2300	85-90	38	19-3/4	1/2 male
155	7/8x3-1/4 or 4-1/4•1x4-1/4	2-5/8	3	2100	110-120	61	22-3/8	3/4 male

* No Oil Reservoir