



UpRight
LX41

Scissor lifts

large deck & supa-deck

Heavy-duty elevating linkage provides sturdy platform at working heights up to 14.34m (47ft.)

Driveable at full elevation

Proportional controls for quick and easy manoeuvring

Superior gradeability for rough job site conditions

Low retracted height assures easy on/off access and simplifies material loading

Exceptionally tight turning radius

Large platform area for tools and materials

Oscillating front axle on 4WD

Five year structural warranty




specifications	LX41SD	LX41DD	LX41Supa-deck
working height (A)	14.34m. (47ft.)*	14.34m. (47ft.)*	14.34m. (47ft.)*
platform height (max.) (B)	12.34m. (41ft.)	12.34m. (41ft.)	12.34m. (41ft.)
platform capacity (max.)			
- one deck extended	680kg. (1500lbs.)	-	-
- two decks extended	-	567kg. (1250lbs.)	567kg. (1250lbs.)
- on deck extension	227kg. (500lbs.)	227kg. (500lbs.)	227kg. (500lbs.)
platform size			
- with one deck extended	1.73m. x 4.8m. (68ins. x 190ins.)	-	-
- with two decks extended	-	1.73m. x 7.06m. (68ins. x 224ins.)	1.73m. x 7.06m. (68ins. x 224ins.)
- with decks retracted	1.73m. x 3.96m. (68ins. x 156ins.)	1.73m. x 3.96m. (68ins. x 156ins.)	1.73m. x 3.96m. (68ins. x 156ins.)
width (E)	2.29 m. (90 ins.)	2.29 m. (90 ins.)	2.29 m. (90 ins.)
length (D)			
- with one deck extended	4.8m. (16ft.)	-	-
- with two decks extended	-	5.6m. (18ft.8ins.)	7.01m. (23ft.)
- with decks retracted	4m. (13ft.3ins.)	4m. (13ft.3ins.)	4m. (13ft.3ins.)
height stowed (C)	2.7m. (9ft.)	2.7m. (9ft.)	2.7m. (9ft.)
- with guardrails lowered	1.8m. (6ft.1ins.)	1.8m. (6ft.1ins.)	1.8m. (6ft.1ins.)
weight			
- 2WD electric	5,298kg. (11,680 lbs.)	5,629 kg. (12,410 lbs.)	5,581kg. (12,304lbs.)
- 2WD bi-energy	4,994kg. (11,010 lbs.)	5,325 kg. (11,740 lbs.)	5,740kg. (12,654lbs.)
- 4WD diesel	4,926 kg (10,860 lbs.)	5,479 kg. (12,080 lbs.)	5,431kg. (11,973lbs.)
inside turning radius	1.22m. (48ins.)	1.22m. (48ins.)	1.22m. (48ins.)
gradeability			
- 2WD electric	17° (30%)	17° (30%)	17° (30%)
- 2WD bi-energy	17° (30%)	17° (30%)	17° (30%)
- 4WD diesel	19° (35%)	19° (35%)	19° (35%)
lift speed			
- 2WD electric	57 secs. / 60 secs.	57 secs. / 60 secs.	57 secs. / 60 secs.
- 2WD bi-energy	57 secs. / 60 secs.	57 secs. / 60 secs.	57 secs. / 60 secs.
- 4WD diesel	45 secs. / 60 secs.	45 secs. / 60 secs.	45 secs. / 60 secs.
drive speed (max.)		4.9km/h. - 0.5km/h. (2.9mph. - 3.1mph.)	
- with platform raised		0.48km/h. - 0.8km/h. (0.3mph. - 0.5mph.)	
tires			
- 2WD electric	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 2WD bi-energy	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 4WD diesel	10 x 16.5 NHS	10 x 16.5 NHS	10 x 16.5 NHS
toeboards	152mm. (6ins.)	152mm. (6ins.)	152mm. (6ins.)
power source			
- 2WD electric		Dual electric 48 VDC	
- 2WD bi-energy		Dual electric 48 VDC / Kubota ZB 200C diesel	
- 4WD diesel		Kubota D905E	

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.
Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

Proportional controls	Air-filled tyres w/sealant
Easy access service modules	Weatherproof electrical enclosure
Oscillating front axle 4WD	Quick folding guardrail system
Descent alarm	Multiple disc, dual wheel parking brake
Tilt alarm	Removable controller
Power to platform	1 year parts/service
Air line to platform	5 year structural warranty

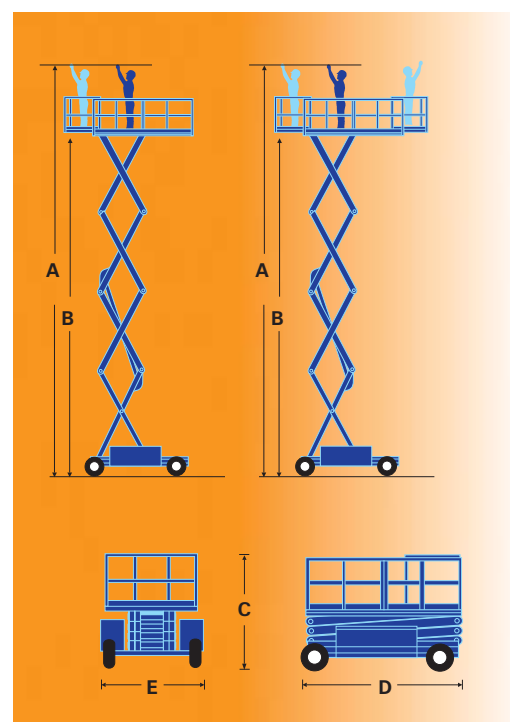

options

- Dual roll-out deck extension
- Outriggers
- Flashing amber beacon
- All motion alarm
- Horn
- Poly-filled tyres
- Diesel exhaust scrubber
- Special paint colours
- Environmental green oil

CE	Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.
	This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

UpRight

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

web: www.upright.com
e-mail: marketing@upright.com

MANUFACTURING

North America
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe/Africa/M. East
Tel + 353 1 620 9300
Fax + 353 1 620 9301

Southern Europe
Tel + 34 91 849 37 41
Fax + 34 91 849 37 41

Germany
Tel + 49 221 1706527
Fax + 49 221 1706536

UK
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

Singapore
Tel + 65 225 1322
Fax + 65 225 5157

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

