

Dynapac CA2500D (4.5)

Single drum vibratory rollers

Atlas Copco



Technical data



Masses

Operating mass (incl. ROPS)	22,300 lbs
Operating mass (incl. Cab)	22,700 lbs
Module mass (front/rear)	12,300/10,400 lbs
Max. operating mass	26,200 lbs



Dimensions

Drum width	84 in
------------	-------



Propulsion

Speed range	0 -7 mp/h
Vertical oscillation	±9°
Tire size (8 ply)	23,1 x 26 AW
Theor. gradeability	51 %



Compaction

Static linear load	146 lbs/in
Nominal amplitude (high/low)	0.071/0.035 in
Vibration frequency (high/low amplitude)	1,980/2,040 vpm
Centrifugal force (high/low amplitude)	56,210/29,230 lb



Engine

Fuel tank capacity	72 gal
--------------------	--------



Engine

Manufacturer/Model	Cummins QSB4.5 (T4i)
Rated power, ISO 14396	97 kW (132 hp) @ 2,200 rpm
Type	Water cooled turbo Diesel



Hydraulic system

Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



rce_ca2500d_45_us-20131219.181306.pdf 2013-12-19 18:13

Dynapac CA2500D (4.5)

Single drum vibratory rollers

Atlas Copco

Technical data

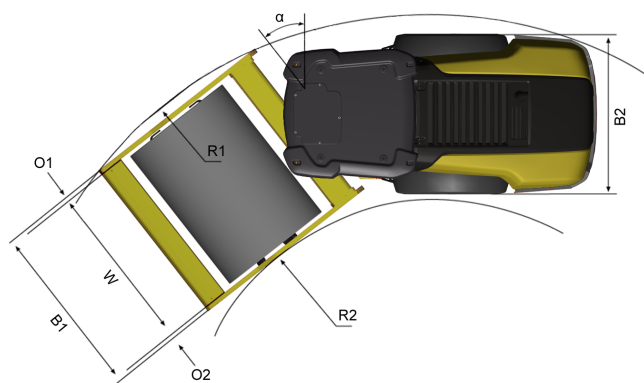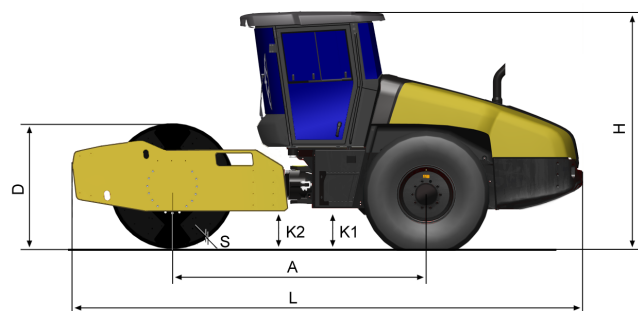

Dimensions

A. Wheelbase	118 in
B1. Width, front	91 in
B2. Width, rear	84 in
D. Drum diameter	59 in
H. Height, with ROPS/cab	113 in
K1. Ground clearance	18 in
K2. Curb clearance	18 in
L. Length	236 in
O1. Overhang, right	3 in
O2. Overhang, left	3 in
R1. Turning radius, outside	220 in
R2. Turning radius, inside	130 in
S. Drum shell thickness	1 in
W. Drum width	84 in
α. Steering angle	±38°



Standard equipment

- 24V outlet socket, operator's platform
- Automatic vibration control
- Back up alarm
- Brake release
- Cross Mounted Engine
- Combi cooler with Hydraulically driven fan
- Display: Engine temp, Fuel level, Hydr. temp, Speedometer, Tachometer, Voltage
- Dual speed drum drive motor
- Emergency stop
- Filler cap inside lockable hood
- Hydraulic checkpoints
- Parking brake
- Shock mounted platform
- Steering wheel, adjustable
- Suspension seat
- Storage Compartment
- Vandal cover
- Warning lights: Air cleaner, Brake, Clogged hyd. fluid filter, Engine oil pressure/temp, Hyd oil temp, Low charge, Low fuel
- 1m X 1m Visibility
- Zero spill oil & coolant change

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

rce_ca2500d_45_us-20131219.181306.pdf 2013-12-19 18:13