

S2545

NARROW SLAB SCISSORS

POWER IN EXPERIENCE

- Excellent serviceability
- Durable
- Built tough

Snorkel

www.snorkelusa.com



S2545

NARROW SLAB SCISSORS

PLATFORM

A. Height.....	25' (7.6 m)
B. Size.....	44" x 90" (112 x 229 cm)
C. Guardrail Height.....	43-1/4" (110 cm)
D. Rollout Extension	36" (91.4 cm)
Capacity.....	850 lbs. (385.6 kg)
Rollout capacity.....	250 lbs. (113 kg)
Stowed Platform Height	45" (114 cm)
Toeboard Height	6" (15 cm)

MACHINE DIMENSIONS

E. Overall Stowed Height....	78-1/2" (199 cm)
F. Overall Width	45" (114 cm)
G. Overall Length.....	95" (241 cm)
H. Wheelbase.....	78" (198 cm)
Ground Clearance	
Platform stowed,	
Pothole Protector raised	4" (10.2 cm)
Ground Clearance	
Platform lowered,	
Pothole Protector lowered....	1-1/4" (3.2 cm)
Tire Size/Type.....	5 x 16 (Solid Rubber)

PERFORMANCE


Weight	4,700 lbs (2,132 kg)
Drive speed - Elevated	0.4 mph (0.6 kph)
Drive speed - Stowed.....	1.1 mph (1.8 kph)
Platform Lift speed.....	25 sec. minimum
	(3-speed control)
Turning Radius - outside.....	115" (292 cm)
Turning Radius - inside.....	30" (76 cm)

OPTIONS

- Swing gate
- Lanyard attachments points
- Horn
- Flashing light
- Battery condition indicator
- AC generator
- EE rating
- Fixed rails

STANDARD FEATURES

- Pothole protection system
- Level sensor
- Printed circuit board with on-board LED diagnostics
- Joystick control on removable console
- 2-wheel parking brakes
- Driveable at full height
- Center pivot-type steering
- 3-speed drive/3-speed lift
- Dual wheel drive system
- Drive motion alarm
- Swing-out trays
- Non-marking tires
- Battery powered with built-in smart charger
- Forklift loadable from 3 sides
- Swing down rails
- Wall-board loading gate
- 125 volt GFCI AC outlet at platform

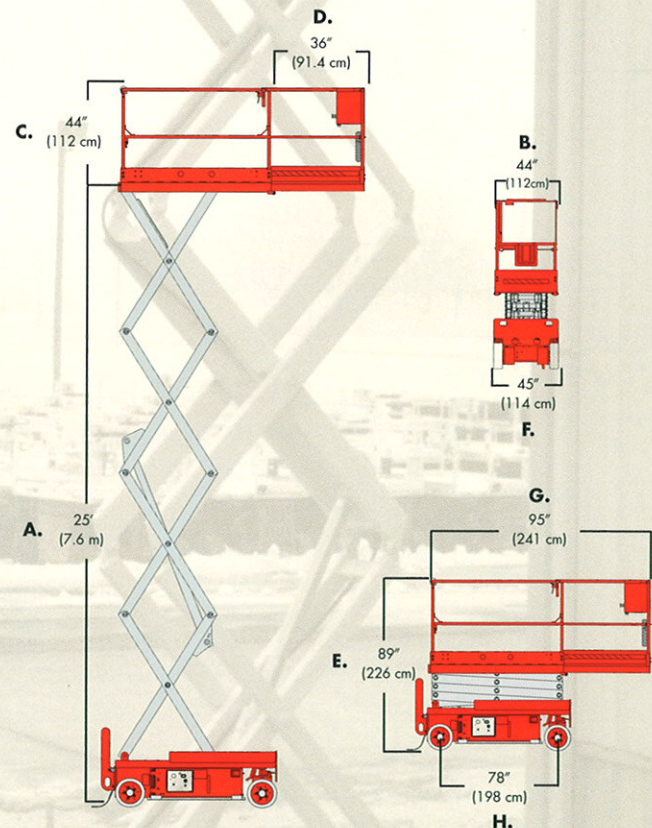

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards.

This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel

An ISO 9001 Registered Company
Printed in U.S.A. S2545 2-01

Corporate U.S.A.
P.O. Box 1160
St. Joseph, MO 64502-1160
800-255-0317 toll free
816-364-0317 Office
816-364-0380 Fax

England
Unit 30, Whitehill Industrial Estate
Whitehill Lane, Wootton Bassett
Wiltshire SN4 7SB, England
+44 1793 849905 tel
+44 1793 852918 fax

Australia
26 Redfern Street
Wetherill Park NSW
2164 Australia
(02) 9725 4000 tel
(02) 9609 3057 fax