

Snorkel 

Wildcat[®] SL 25

Swing-down low profile rails, a wallboard loading gate, and a wide variety of standard features make these machines ideal for slab-type construction, building renovation, or maintenance work of all types.



S P E C I F I C A T I O N S

Working height	31'	9.4 m
Platform		
Height	25'	7.6 m
Capacity ²	850 lbs.	385.6 kg
Size	44" x 90"	112 x 229 cm
Guardrail Height	43 1/4"	110 cm
Toeboard Height	6"	15 cm
Stowed Platform Height	45"	114 cm
Stowed Overall Height¹	78 1/2"	199 cm
Overall Width	45"	114 cm
Overall Length	95"	241 cm
Wheelbase	78"	198 cm
Turning Radius		
Inside	30"	76 cm
Outside	115"	292 cm
Gradeability		25 %
Drive Speeds		
Speed No. 1 Elevated	0.4 mph	0.6 kph
Speed No. 2 Stowed	1.1 mph	1.8 kph
Speed No. 3 Stowed	2.0 mph	3.2 kph
Platform Lift Speed		25 sec. minimum
(3 speed control)		
Ground Clearance (Approx.)		
Platform Stowed/Pothole Protector Raised	4"	10.2 cm
Platform Raised/Pothole Protector Lowered	11 1/4"	3.2 cm
Tire Size	5.75" x 16"	13 x 41 cm
Type		Solid Rubber
Weight (Approx.)	4,700 lbs.	2,132 kg.
Shipping Cube With Low Profile Guardrails	194 ft. ³	5.5m ³

¹Swing-down rails in low profile position

²Rated load on roll-out extension deck is 250 lbs. (113 kg)

- Automatically activated pothole protection
- Built-in level sensor interlocks
- Swing down, low profile rails
- Wallboard loading gate
- 3' roll-out extension
- Joystick control on removable control console
- Responsive center pivot-type steering
- 3-speed drive/3-speed lift
- Dual wheel drive system
- Motion warning alarm
- 2-wheel parking brakes
- Drivable at full work height
- Swing-out trays for batteries and hydraulics
- Lift out battery tray
- Non-marking tires
- Battery powered with built-in charger
- 60 month factory warranty

Snorkel 



Wildcat[®] SL 25

Narrow Slab SCISSORS

Optional Equipment

- Swinging gate
- Fixed rails
- AC outlet on platform
- GFCI AC outlet at platform
- D-Ring lanyard attachments
- Operator horn
- Flashing light
- Battery condition indicator
- AC generator
- EE rating

* 78.5" WITH SWING
DOWN RAILS IN
LOWERED POSITION

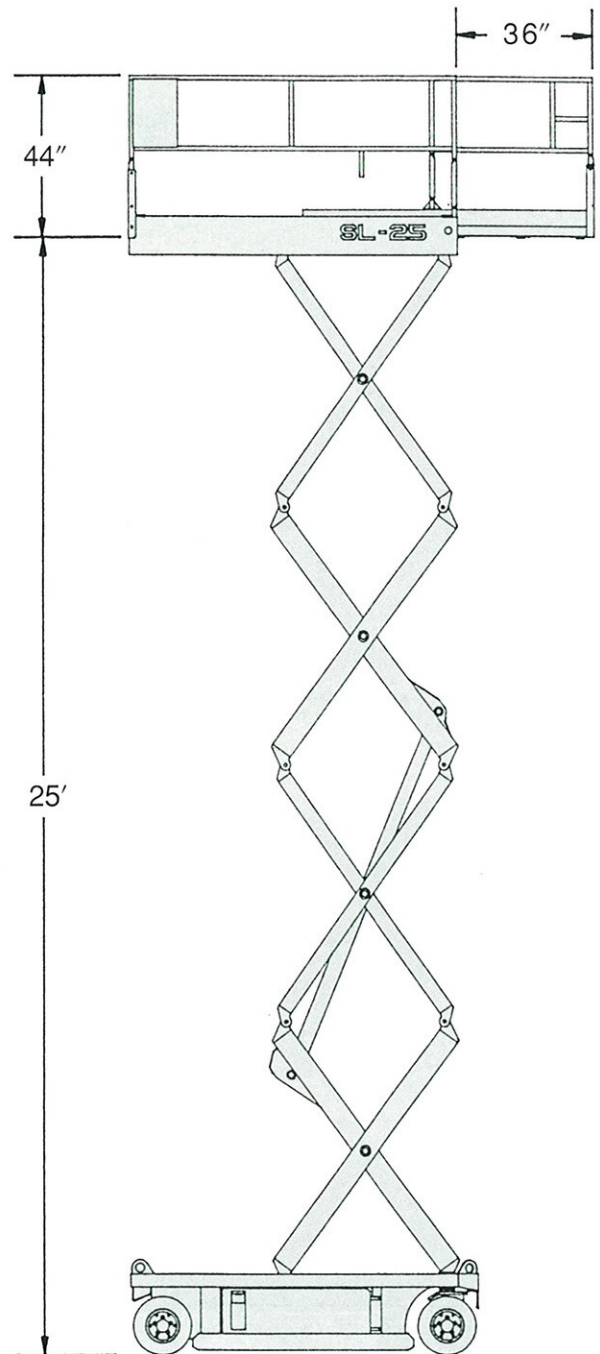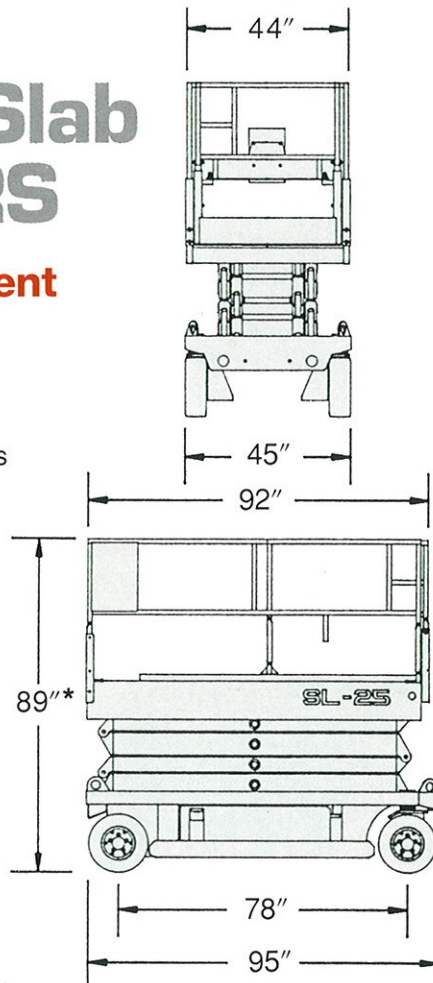

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform.

Aerial work platforms must be elevated only on a firm, level surface.

Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel 

P.O. Box 4065
St. Joseph, MO 64504-0065
Phone (816) 364-0317
Fax (816) 364-0380